



WEAR MAT - RECTANGULAR





INSTALL GUIDE

SAFETY

- Check to ensure that plans will meet local codes and guidelines
- Space equipment to ensure proper traffic flow and safe usage

MAT SIZES


Version	Shape	Size	Thickness	Weight	Features
APS-Swing/Slide WearMat	Square	40"x40"	1.5"	64 lbs.	1 piece, beveled edge, waffle pattern on bottom
APS-SwingMat	Rectangle	60"x36"	2.0"	115 lbs.	1 piece, beveled edge, waffle pattern on bottom
APS-WearMat-8x4x2	Rectangle	96"x48"	2.0"	1,075 lbs.	2 piece, beveled edge, waffle pattern on bottom, interlocking seam
APS-ResidentialWearMat	Rectangle	40"x24"	1.0"	25 lbs.	1 piece, beveled edge, rounded corners

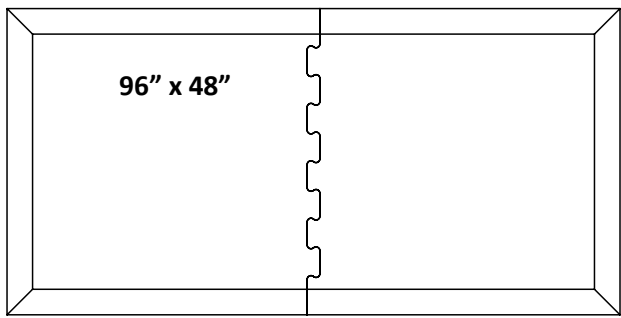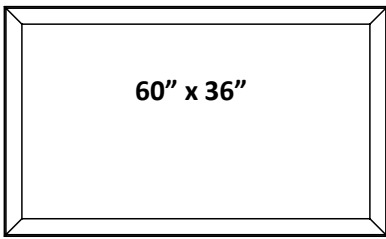


INSTALL GUIDE

FEATURES


Beveled Edge

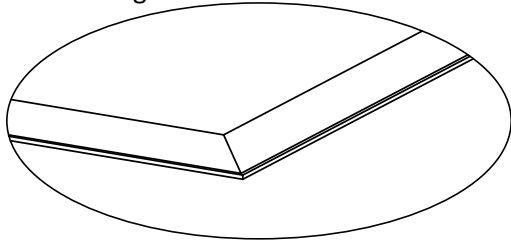

Waffle Pattern on Bottom

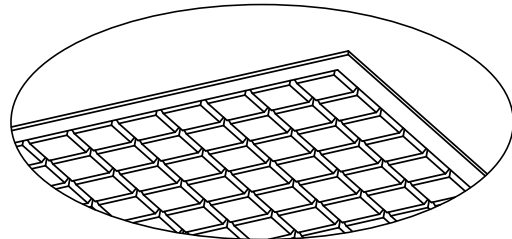

Interlocking Seam

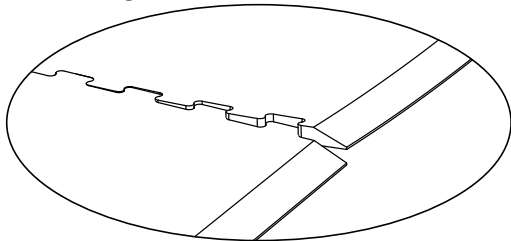


INSTALLATION

- Prepare surface by layering $\frac{1}{2}$ to $\frac{3}{4}$ of safety surfacing material on ground and tamp to create firm level surface.

Smooth, level ground

$\frac{1}{2}$ to $\frac{3}{4}$ Safety Surfacing

Tamp firm and level

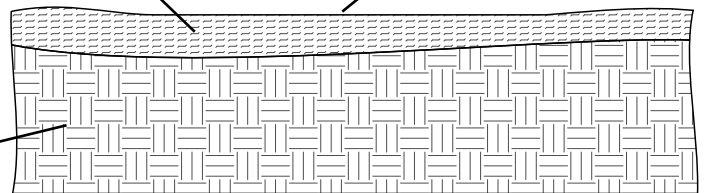


- Place mat, smooth surface facing up on top of prepared surface. Cover wear mat and surrounding area with remaining $\frac{1}{2}$ to $\frac{3}{4}$ of safety surfacing material. Over time, the mat will be exposed from normal wear and tear providing a more stable surface in high traffic areas.

Remaining $\frac{1}{2}$ to $\frac{3}{4}$ Safety Surfacing

Mat

Surfacing material covers edges


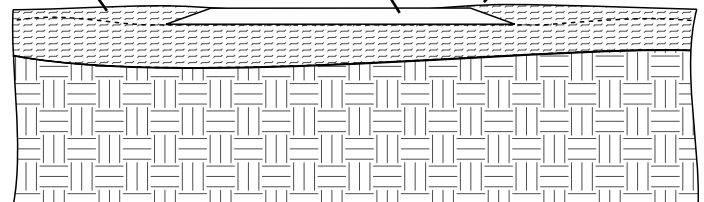


- If installing over a unitary surface, simply place wear mat smooth surface facing up in required area.

INSTALL GUIDE

INSTALLATION

- Place mats in high-wear areas to protect the playground surface

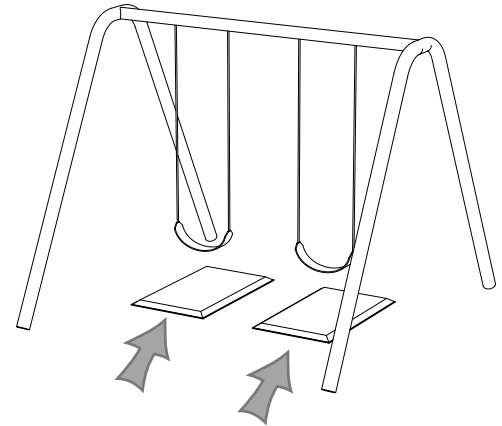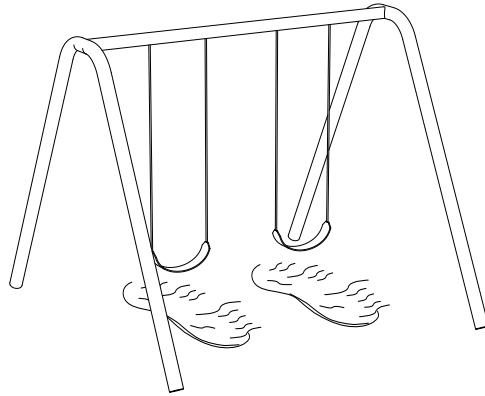

- A mallet or hammer is helpful for joining the interlocking seams

